

Figure 1

```
Accept (information)

Extract(tracking identifier)

Transmit(tracking identifier)

if (display information flag = TRUE) then
Display(target information URL)

end if

Receive (tracking identifier)

if (analyze information flag = TRUE)

analyze (tracking identifier)

if (analyze information flag = TRUE)

analyze (tracking identifier)
```

numeric value = numeric value + 1
if (server = NULL) then
 (server = DEFAULT SERVER)
end if
if (protocol = NULL) then
 (protocol = http://)

1: Accept information feeds

url = protocol || server tracking identifier = url & numeric value

Encode (tracking identifier, information)

Transmit (information)

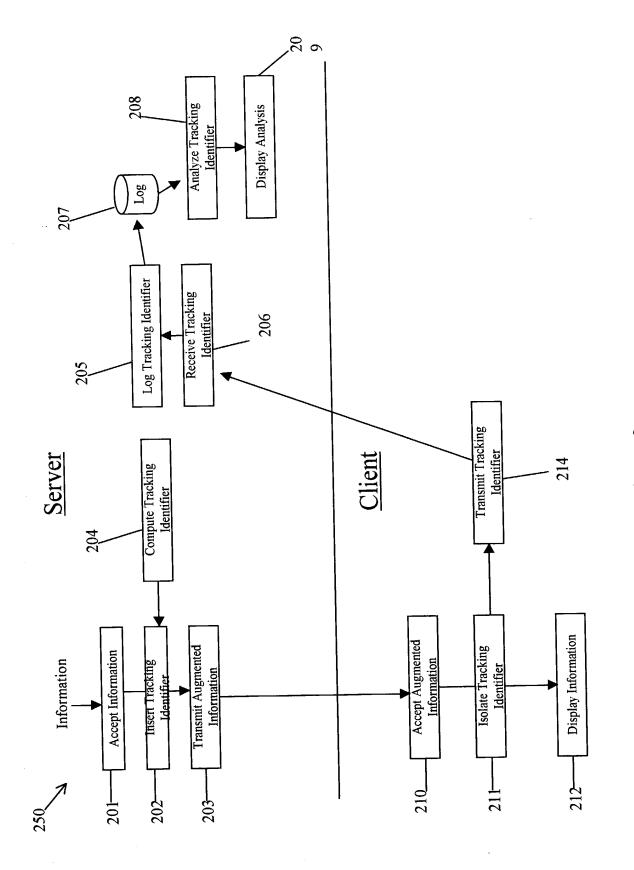


Figure 3

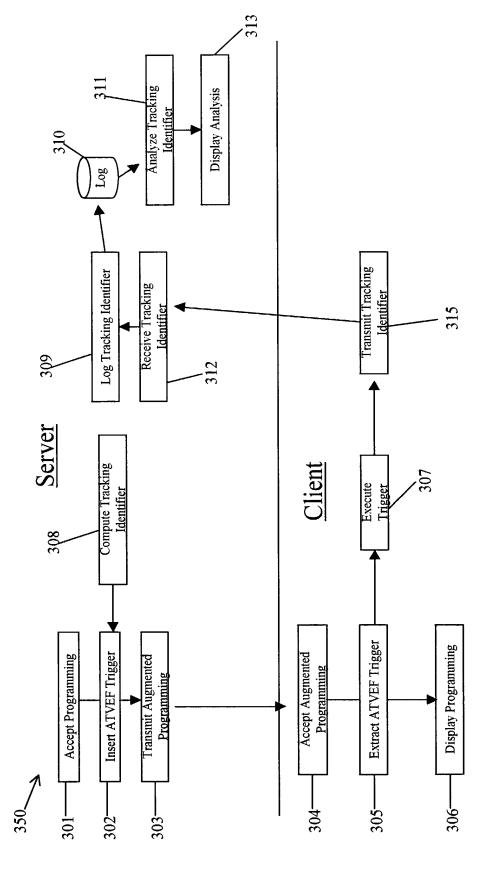


Figure 4